
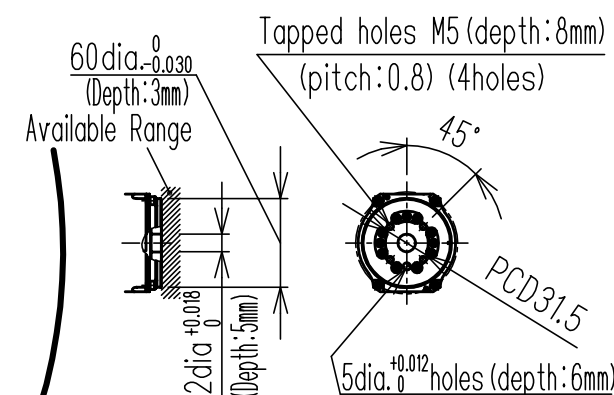
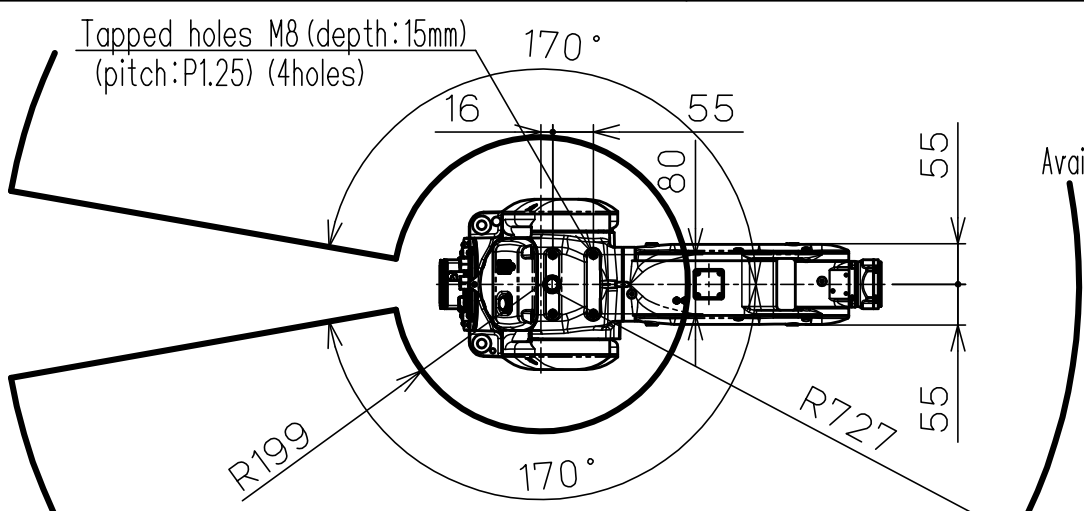






DWG.NO. HW1384162

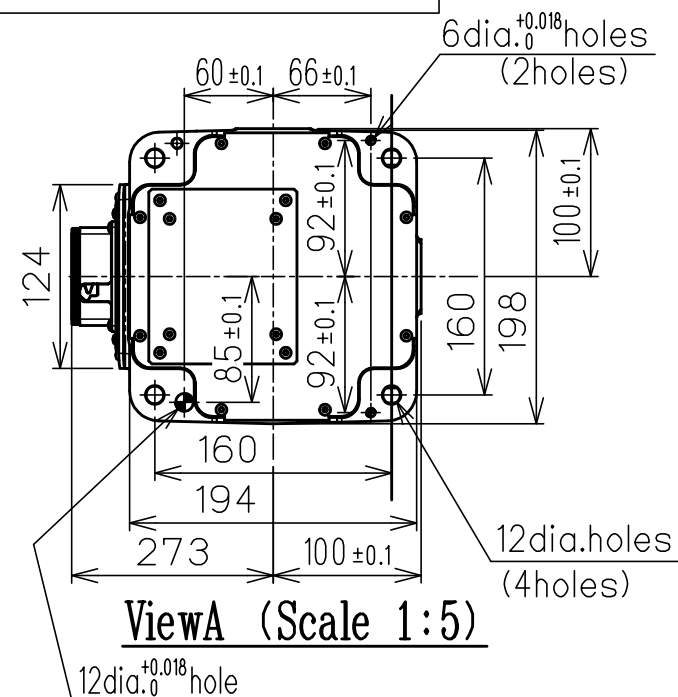

Type	Note
YR-1-06VX8-A00	STANDARD
YR-1-06VX8-B00	ANTI-CORROSIVE COAT

Item	Model	MOTOMAN-GP8/AR700
Configuration		Vertically Articulated
Degree of Freedom		6
Payload		8kg
Repeatability *1		±0.02mm
Range of motion	S-Axis (Turning)	-170° - +170°
	L-Axis (Lower Arm)	-65° - +150°
	U-Axis (Upper Arm)	-113° - +255°
	R-Axis (Roll)	-190° - +190°
	B-Axis (Pitch/Yaw)	-135° - +135°
	T-Axis (Twist)	-360° - +360°
Maximum speed	S-Axis	7.94rad/s, 455° /s
	L-Axis	6.72rad/s, 385° /s
	U-Axis	9.07rad/s, 520° /s
	R-Axis	9.59rad/s, 550° /s
	T-Axis	17.45rad/s, 1000° /s
Allowable Moment	R-Axis	17Nm (1.73kgfm)
	B-Axis	17Nm (1.73kgfm)
	T-Axis	10Nm (1.02kgfm)
Allowable Inertia (GD ² /4)	R-Axis	0.5kg·m ²
	B-Axis	0.5kg·m ²
	T-Axis	0.2 kg·m ²
Approx. Robot mass		32kg
Protected structure		IP67
Mounting method *2		Floor-mounted, Wall-mounted, Tilt-mounted, Ceiling-mounted
Ambient Conditions	Temperature	0 to 45 °C
	Humidity	20 to 80%RH (Non-Condensing)
	Vibration	Less than 4.9m/s ² (0.5G)
	Altitude	1000 m or less
	Others	•Free from explosive or corrosive gas and liquid. •Free from electrical noise. •Free from strong magnetic fields.
Power Requirements		1KVA
Controller		YRC1000

Notes: *1 Repeatability is conformed to ISO 9283.
*2 When the manipulator is installed on a tilt or a wall, the motion of S-axis will be limited.
*3 The manipulator is in the home position.

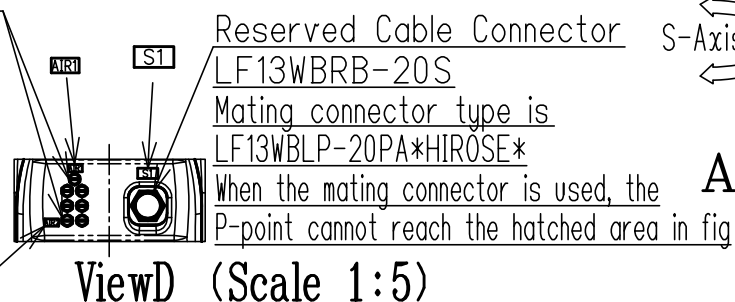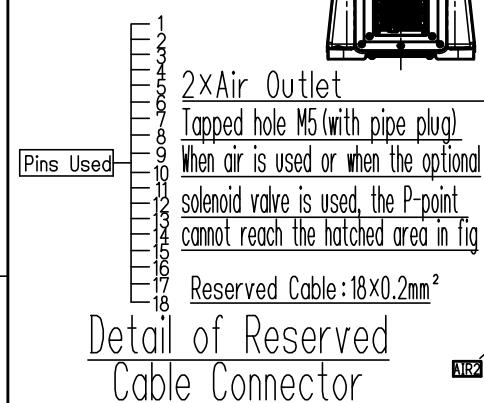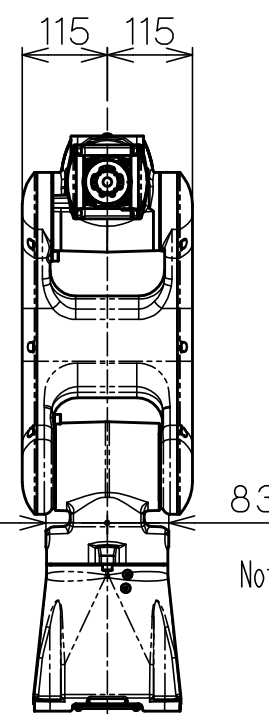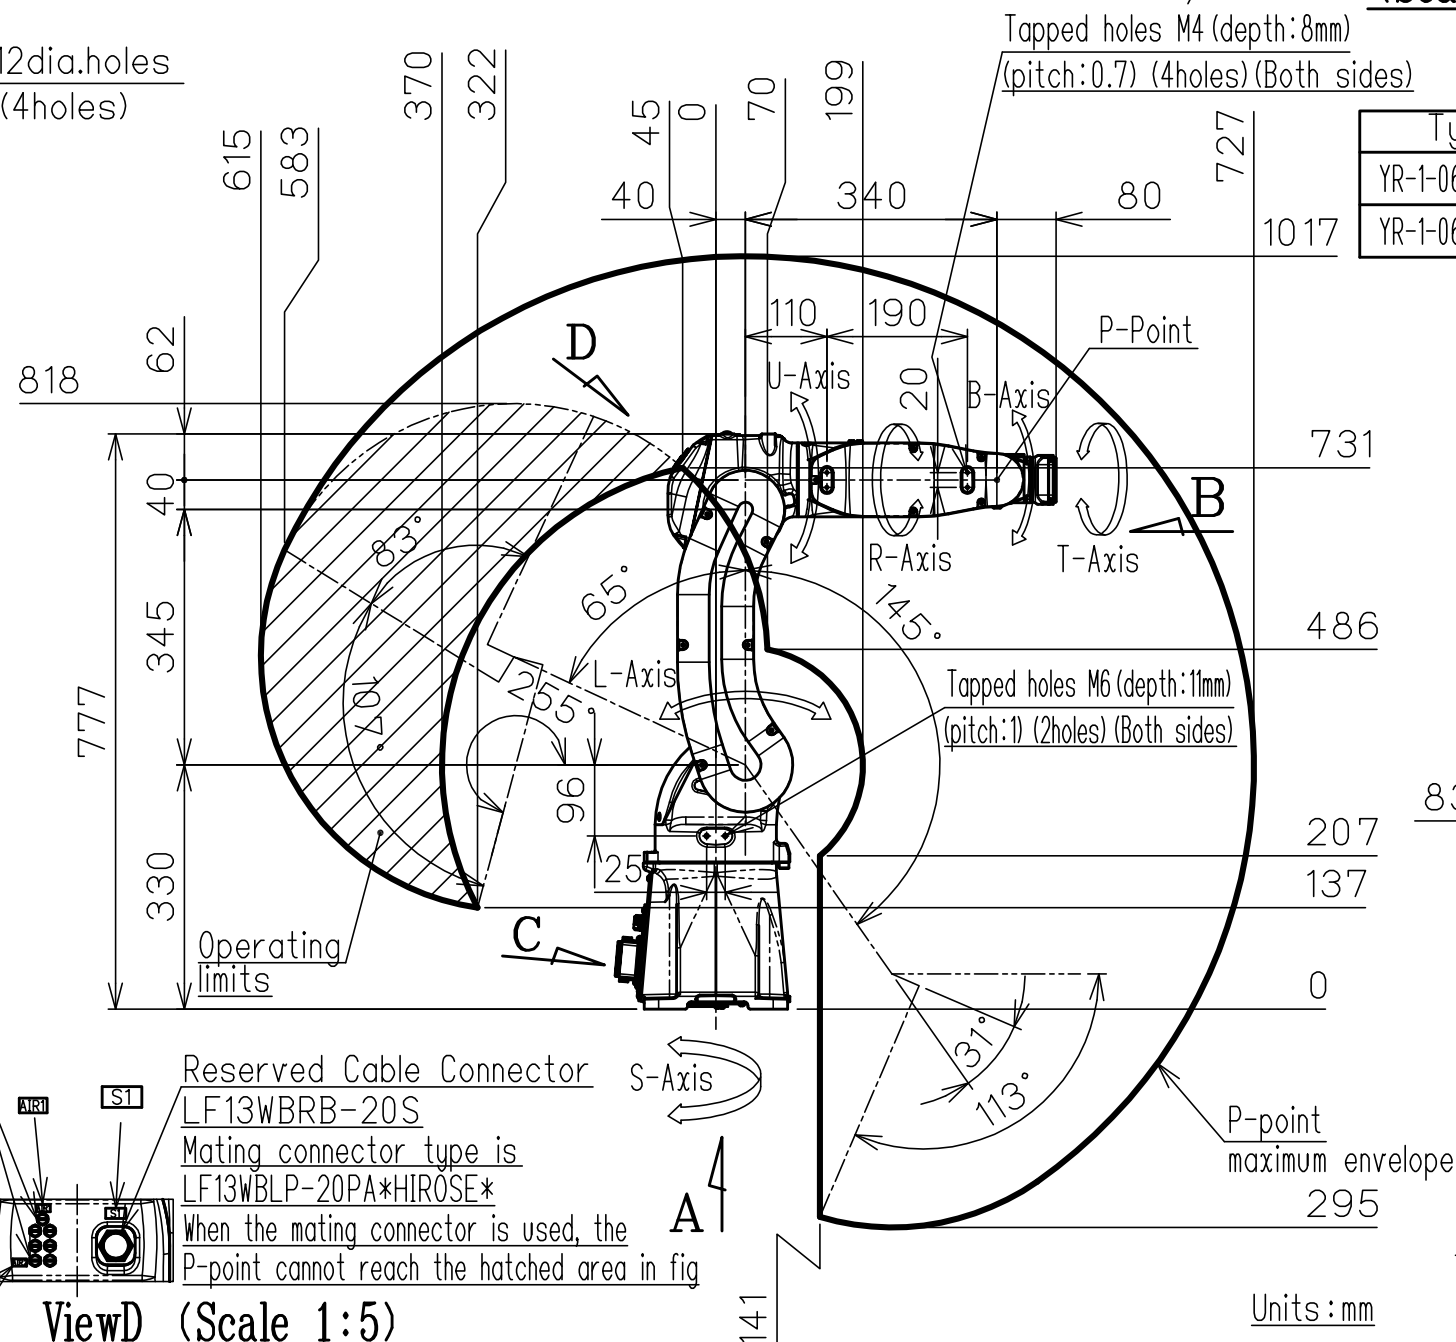

Note:
1. All rights reserved.
2. Please note that the data is subject to be deleted without advance notice.
3. No warranty is given in relation to the data including the specification.
4. We are not responsible for any damages or loss caused by the use of the data.

FOR STUDY PURPOSE ONLY

SCALE 1:10

YASKAWA
株式会社 安川電機

Reference Drawing

TITLE MOTOMAN-GP8/AR700
DIMENSION DIAGRAM

DRWN DATE ' 16.08.17

DWG.NO. HW1384162

SIZE A3